




0059071A2S01

110 Delta Drive
Pittsburgh, PA 15238
NAFTA Sales: (1)800-245-3984
HK Sales : (852)3102-9337
magnetics@spang.com
www.mag-inc.com

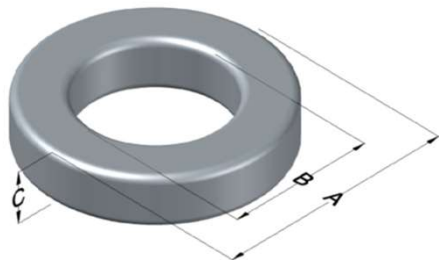

High Bias Edge Permeability (μ)	A_L (nH/T ²)	Core Marking			Coating Color
		Lot Number	Part Number	Inductance Grade	
60	61 $\pm$ 8%	XXXXXX	59071A2S01	N/A	Green

Dimensions	Uncoated		Coated Limits			Packaging Cardboard cut-outs Box Qty= 250 pcs
	(mm)	(in)	(mm)	(in)		
OD (A)	32.79	1.291	33.66	1.325	max	
ID (B)	20.09	0.791	19.46	0.766	min	
HT (C)	10.67	0.420	11.43	0.450	max	

Electrical Characteristics			Physical Characteristics						
Watt Loss @ 100kHz, 100mT max (mW/cm ³)	DC Bias min (oersteds)		Voltage Breakdown wire to wire min (V _{AC})	Break Strength min (kg)	Window Area W _a (mm ²)	Cross Section A _e (mm ²)	Path Length L _e (mm)	Volume V _e (mm ³)	Weight (g)
700	80%	50%	3000	79.0	297	65.6	81.4	5,340	44.9
	130	200							

Winding Information						Temperature Rating	
Winding Length Per Turn				Wound Coil Dimensions (mm)			Curie Temp: 500°C
Winding Factor	(mm)	Winding Factor	(mm)	40% Winding Factor	OD	37.7	Coating Temp (Continuous up to): 200°C
					HT	17.4	
				Completely Full Window	Max OD	39.7	Notes:
					Max HT	25.4	
				0%	37.1	40%	
20%	42.1	45%	48.7				
25%	43.3	50%	50.0				
30%	44.5	60%	53.2	Unwound Core		3,100	
35%	46.0	70%	56.7	40% Winding Factor		4,700	

Typical DC Bias Performance

