




**0059122A2**

110 Delta Drive  
 Pittsburgh, PA 15238  
 NAFTA Sales: (1)800-245-3984  
 HK Sales : (852)3102-9337  
 magnetics@spang.com  
 www.mag-inc.com

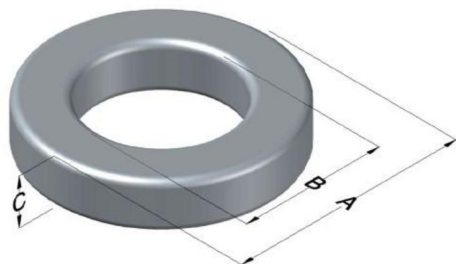

Edge Permeability ( $\mu$ )	$A_L$ (nH/T <sup>2</sup> )	Core Marking			Coating Color
		Lot Number	Part Number	Inductance Grade	
26	15 $\pm$ 8%	XXXXXX	59122A2	N/A	Green

Dimensions					Packaging	
Uncoated			Coated Limits			
	(mm)	(in)	(mm)	(in)		
OD (A)	16.59	0.653	17.27	0.680	max	Cardboard cut-outs Box Qty = 2000 Pcs
ID (B)	10.16	0.400	9.53	0.375	min	
HT (C)	6.35	0.250	7.11	0.280	max	

Electrical Characteristics			Physical Characteristics						
Watt Loss @ 100kHz, 100mT (max, mW/cm <sup>3</sup> )	DC Bias min (Oersteds)		Voltage Breakdown wire-to-wire min (V <sub>AC</sub> )	Break Strength (min, kg)	Window Area, W <sub>A</sub> (mm <sup>2</sup> )	Cross Section, A <sub>e</sub> (mm <sup>2</sup> )	Path Length, L <sub>e</sub> (mm)	Volume V <sub>e</sub> (mm <sup>3</sup> )	Weight (g)
	80%	50%							
725	240	390	1250	23.1	71.2	19.2	41.2	791	5.7

Winding Information					Temperature Rating	
Winding Length per Turn				Wound Coil Dimensions (mm)		
Winding Factor	(mm)	Winding Factor	(mm)	40% Winding Factor	OD	18.8
0%	22.0	40%	26.8	Completely Full Window	HT	10.1
20%	24.4	45%	27.6		Max OD	23.7
25%	25.0	50%	28.3	Surface Area (mm <sup>2</sup> )	Max HT	15.2
30%	25.6	60%	29.7		Unwound Core:	920
35%	26.2	70%	31.4		40% Wound:	1300

Curie Temp (°C): 500 °C  
 Coating Temp: 200 °C  
 (Continuous, up to; °C)  
**Notes:**

