




0059352A2

110 Delta Drive
 Pittsburgh, PA 15238
 NAFTA Sales: (1)800-245-3984
 HK Sales : (852)3102-9337
 magnetics@spang.com
 www.mag-inc.com

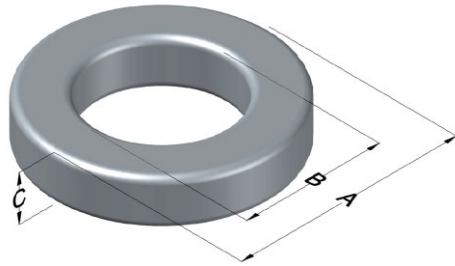

Edge Permeability (μ)	A_L (nH/T ²)	Core Marking			Coating Color
		Lot Number	Part Number	Inductance Grade	
26	22 ± 8%	XXXXXX	59352A2	N/A	Green

Dimensions					Packaging	
Uncoated			Coated Limits			
	(mm)	(in)	(mm)	(in)		
OD (A)	23.57	0.928	24.33	0.958	max	Cardboard cut-outs Box Qty = 720 Pcs
ID (B)	14.40	0.567	13.77	0.542	min	
HT (C)	8.89	0.350	9.65	0.380	max	

Electrical Characteristics			Physical Characteristics						
Watt Loss @ 100kHz, 100mT (max, mW/cm ³)	DC Bias min (Oersteds)		Voltage Breakdown wire-to-wire min (V _{AC})	Break Strength (min, kg)	Window Area, W _A (mm ²)	Cross Section, A _e (mm ²)	Path Length, L _e (mm)	Volume V _e (mm ³)	Weight (g)
	80%	50%							
725	240	350	1000	47.1	147	38.8	58.8	2280	16.4

Winding Information					Temperature Rating			
Winding Length per Turn			Wound Coil Dimensions (mm)			Curie Temp (°C):		500 °C
Winding Factor	(mm)	Winding Factor	(mm)	40% Winding Factor	OD	26.7	Coating Temp: (Continuous, up to; °C)	200 °C
					0%	29.8		
20%	33.4	45%	38.0	Completely Full Window	Max OD	33.5	Notes:	
25%	34.2	50%	38.9		Max HT	21.4		
30%	35.0	60%	41.1	Surface Area (mm ²)				
35%	36.1	70%	43.6	Unwound Core:	1800			
				40% Wound:	2700			

