




0059381A2S01

110 Delta Drive
Pittsburgh, PA 15238
NAFTA Sales: (1)800-245-3984
HK Sales : (852)3102-9337
magnetics@spang.com

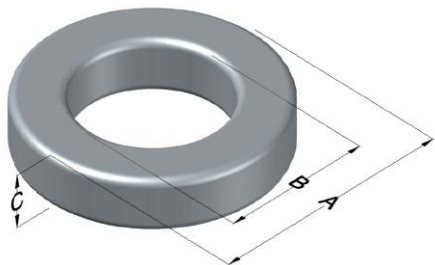


High Bias Edge Permeability (μ)	A_L (nH/T ²)	Core Marking			Coating Color
		Lot Number	Part Number	Inductance Grade	
60	43 $\pm$ 8%	XXXXXX	59381A2S01	N/A	Green

Dimensions	Uncoated		Coated Limits			Packaging
	(mm)	(in)	(mm)	(in)		
OD (A)	17.27	0.680	18.03	1.000	max	Bulk Pack 4 bags/box Box Qty= 2000 pcs
ID (B)	9.65	0.380	9.02	0.355	min	
HT (C)	6.35	0.250	7.11	0.280	max	

Electrical Characteristics			Physical Characteristics						
Watt Loss @ 100kHz, 100mT max (mW/cm ³)	DC Bias min (oersteds)		Voltage Breakdown wire to wire min (V _{AC})	Break Strength min (kg)	Window Area W _a (mm ²)	Cross Section A _e (mm ²)	Path Length L _e (mm)	Volume V _e (mm ³)	Est. Weight (g)
700	80%	50%	1250	28.0	63.9	23.3	41.1	960	7.81
	130	200							

Winding Information							Temperature Rating	
Winding Length Per Turn				Wound Coil Dimensions (mm)			Curie Temp:	500°C
Winding Factor	(mm)	Winding Factor	(mm)	40% Winding Factor	OD	20.0	Coating Temp (Continuous up to): 200°C	
					HT	10.1		
				Completely Full Window	Max OD	20.0		Notes:
					Max HT	13.1		
				0%	23.2	40%		
20%	25.6	45%	28.5					
25%	26.2	50%	29.2					
30%	26.6	60%	30.7	Unwound Core	990			
35%	27.3	70%	32.2	40% Winding Factor	1,400			

Typical DC Bias Performance

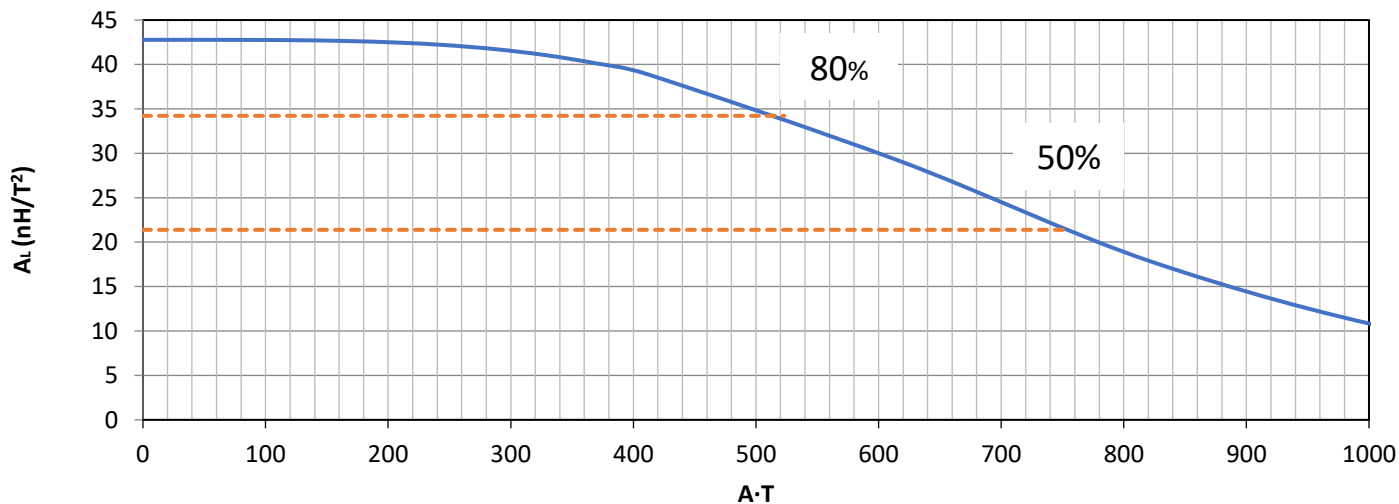

Revision 7/13/2023