




0059932A2

110 Delta Drive
 Pittsburgh, PA 15238
 NAFTA Sales: (1)800-245-3984
 HK Sales: (852)3102-9337
 magnetics@spang.com
 www.mag-inc.com

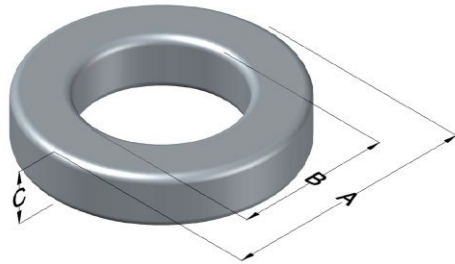

Edge Permeability (μ)	A_L (nH/T ²)	Core Marking			Coating Color
		Lot Number	Part Number	Inductance Grade	
26	32 ± 8%	XXXXXX	59932A2	N/A	Green

Dimensions						Packaging
Uncoated			Coated Limits			
	(mm)	(in)	(mm)	(in)		
OD (A)	26.92	1.060	27.69	1.090	max	
ID (B)	14.73	0.580	14.10	0.555	min	
HT (C)	11.18	0.440	11.94	0.470	max	

Cardboard cut-outs
Box Qty = 400 Pcs

Electrical Characteristics			Physical Characteristics						
Watt Loss @ 100kHz, 100mT (max, mW/cm ³)	DC Bias min (Oersteds)		Voltage Breakdown wire-to-wire min (V _{AC})	Break Strength (min, kg)	Window Area, W _A (mm ²)	Cross Section, A _e (mm ²)	Path Length, L _e (mm)	Volume V _e (mm ³)	Weight (g)
	80%	50%							
725	240	350	2000	76.6	156	65.4	63.5	4150	29.8

Winding Information					Temperature Rating			
Winding Length per Turn				Wound Coil Dimensions (mm)		Curie Temp (°C):	500 °C	
Winding Factor	(mm)	Winding Factor	(mm)	40% Winding Factor	OD	30.0	Coating Temp: (Continuous, up to; °C)	200 °C
0%	37.5	40%	44.6	Completely Full Window	HT	16.5		
20%	41.1	45%	45.7		Max OD	37.3		
25%	41.9	50%	46.6	Max HT	24.0			
30%	42.8	60%	48.8	Surface Area (mm ²)				
35%	43.8	70%	51.3	Unwound Core:	2400			
				40% Wound:	3500			

