




**0076587A7**

110 Delta Drive  
 Pittsburgh, PA 15238  
 NAFTA Sales: (1)800-245-3984  
 HK Sales : (852)3102-9337  
 magnetics@spang.com  
 www.mag-inc.com

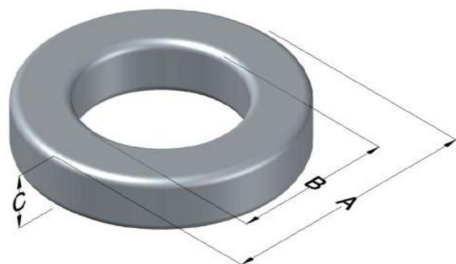

Kool M $\mu$ Hf Permeability ( $\mu$ )	$A_L$ (nH/T <sup>2</sup> )	Core Marking			Coating Color
		Lot Number	Part Number	Inductance Grade	
26	16 $\pm$ 8%	XXXXXX	76587A7	N/A	Black

Dimensions					Packaging
Uncoated			Coated Limits		
	(mm)	(in)	(mm)	(in)	
OD (A)	34.29	1.350	35.18	1.385	
ID (B)	23.37	0.920	22.56	0.888	
HT (C)	8.89	0.350	9.78	0.385	

Electrical Characteristics			Physical Characteristics						
Watt Loss @ 100kHz, 100mT (max, mW/cm <sup>3</sup> )	DC Bias min (Oersteds)		Voltage Breakdown wire-to-wire min (V <sub>AC</sub> )	Break Strength (min, kg)	Window Area, W <sub>A</sub> (mm <sup>2</sup> )	Cross Section, A <sub>e</sub> (mm <sup>2</sup> )	Path Length, L <sub>e</sub> (mm)	Volume V <sub>e</sub> (mm <sup>3</sup> )	Weight (g)
	80%	50%							
550	130	245	3000	53.5	399	46.4	89.5	4150	24.5

Winding Information					Temperature Rating	
Winding Length per Turn			Wound Coil Dimensions (mm)		Curie Temp (°C):	500 °C
Winding Factor	(mm)	Winding Factor	(mm)	40% Winding Factor	OD	40.5
0%	32.2	40%	44.0	Completely Full Window	HT	16.8
20%	38.1	45%	45.6		Max OD	50.1
25%	39.6	50%	47.3	Surface Area (mm <sup>2</sup> )	Max HT	29.0
30%	40.6	60%	50.8		Unwound Core:	2900
35%	42.5	70%	54.9		40% Wound:	5500

Coating Temp: (Continuous, up to; °C) 200 °C

Notes:

### Typical DC Bias Performance

