




0077425A7

110 Delta Drive
 Pittsburgh, PA 15238
 NAFTA Sales: (1)800-245-3984
 HK Sales : (852)3102-9337
 magnetics@spang.com

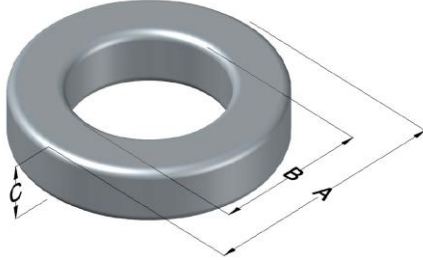

Kool Mμ Permeability (μ)	A _L (nH/T ²)	Core Marking			Coating Color
		Lot Number	Part Number	Inductance Grade	
90	104 ± 8%	XXXXXXX	77425A7	N/A	Black

Dimensions	Uncoated		Coated Limits			Packaging
	(mm)	(in)	(mm)	(in)		
OD (A)	30.00	1.181	30.80	1.212	max	Cardboard cut-outs Box Qty = TBD
ID (B)	17.40	0.685	16.70	0.657	min	
HT (C)	10.90	0.429	11.80	0.464	max	

Electrical Characteristics			Physical Characteristics						
Watt Loss @ 100 kHz, 100 mT max (mW/cm ³)	DC Bias min (oersteds)		Voltage Breakdown wire to wire min (V _{AC})	Break Strength min (kg)	Window Area W _a (mm ²)	Cross Section A _e (mm ²)	Path Length L _e (mm)	Volume V _e (mm ³)	Est. Weight (g)
	750	80%							
	21	52							

Winding Information					Temperature Rating	
Winding Length Per Turn				Wound Coil Dimensions (mm)		Curie Temp: 500°C
Winding Factor	(mm)	Winding Factor	(mm)	40% Winding Factor		Notes:
				OD	35.3	
				HT	20.7	
				Completely Full Window		
				Max OD	35.3	
				Max HT	25.2	
				Surface Area (mm ²)		
				Unwound Core	2,800	
				40% Winding Factor	4,700	

