




0078122A7S01

110 Delta Drive
Pittsburgh, PA 15238
NAFTA Sales: (1)800-245-3984
HK Sales : (852)3102-9337
magnetics@spang.com
www.mag-inc.com

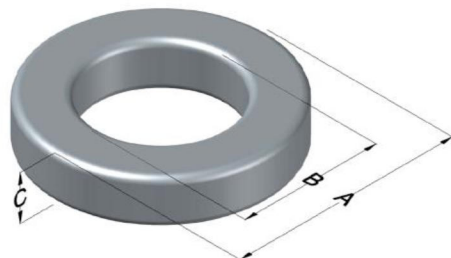

XFLUX Permeability (μ)	A_L (nH/T ²)	Core Marking			Coating Color
		Lot Number	Part Number	Inductance Grade	
26	15 $\pm$ 8%	XXXXXX	78122A7S01	N/A	Brown

Dimensions	Uncoated		Coated Limits			Packaging Bulk Pack 4 bags/box Box Qty= 2000 pcs
	(mm)	(in)	(mm)	(in)		
OD (A)	16.59	0.653	17.27	0.680	max	
ID (B)	10.16	0.400	9.53	0.375	min	
HT (C)	6.35	0.250	7.11	0.280	max	

Electrical Characteristics			Physical Characteristics						
Watt Loss @ 50 kHz, 100mT max(mW/cm³)	DC Bias min (oersteds)		Voltage Breakdown wire to wire min (V _{AC})	Break Strength min (kg)	Window Area W _A (mm²)	Cross Section A _e (mm²)	Path Length L _e (mm)	Volume V _e (mm³)	Weight (g)
1000	80%	50%	1250	23.0	71.2	19.2	41.2	791	6.1000
	230	420							

Winding Information						Temperature Rating	
Winding Length Per Turn				Wound Coil Dimensions (mm)			Curie Temp: 700°C
Winding Factor	(mm)	Winding Factor	(mm)	40% Winding Factor	OD	18.8	Coating Temp (Continuous up to): 200°C
					HT	10.1	
	Completely Full Window	Max OD	23.7	Notes:			
		Max HT	15.2				
		Surface Area (mm²)					
0%	22.0	40%	26.8		Unwound Core		920
20%	24.4	45%	27.6		40% Winding Factor		1,300
25%	25.0	50%	28.3				
30%	25.6	60%	29.7				
35%	26.2	70%	31.4				

Typical DC Bias Performance

