




0078189A7S01

110 Delta Drive
Pittsburgh, PA 15238
NAFTA Sales: (1)800-245-3984
HK Sales : (852)3102-9337
magnetics@spang.com
www.mag-inc.com

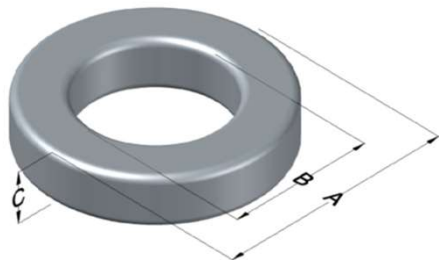

Xflux Si Permeability (μ)	A_L (nH/T ²)	Core Marking			Coating Color
		Lot Number	Part Number	Inductance Grade	
40	92 $\pm$ 8%	XXXXXX	78189A7	N/A	Brown

Dimensions	Uncoated		Coated Limits			Packaging
	(mm)	(in)	(mm)	(in)		
OD (A)	57.15	2.250	58.04	2.285	max	Cardboard cut-outs Box Qty= 80 pcs
ID (B)	26.39	1.039	25.58	1.007	min	
HT (C)	15.24	0.600	16.13	0.635	max	

Electrical Characteristics			Physical Characteristics						
Watt Loss @ 50kHz, 100mT max (mW/cm ³)	DC Bias min (oersteds)		Voltage Breakdown wire to wire min (V _{AC})	Break Strength min (kg)	Window Area W _a (mm ²)	Cross Section A _e (mm ²)	Path Length L _e (mm)	Volume V _e (mm ³)	Weight (g)
	80%	50%							
925	140	250	3000	163.0	514	229	125.1	28,600	240

Winding Information						Temperature Rating	
Winding Length Per Turn				Wound Coil Dimensions (mm)			Curie Temp: 700°C
Winding Factor	(mm)	Winding Factor	(mm)	40% Winding Factor	OD	63.2	Coating Temp (Continuous up to): 200°C
					HT	23.9	
				Completely Full Window	Max OD	63.2	Notes:
					Max HT	34.3	
				0%	64.7	40%	
20%	71.4	45%	79.9				
25%	72.9	50%	81.6				
30%	74.4	60%	85.7	Unwound Core		8,500	
35%	76.3	70%	90.3	40% Winding Factor		12,000	

Typical DC Bias Performance

