




0079257A7

110 Delta Drive
 Pittsburgh, PA 15238
 NAFTA Sales: (1)800-245-3984
 HK Sales : (852)3102-9337
 magnetics@spang.com
 www.mag-inc.com

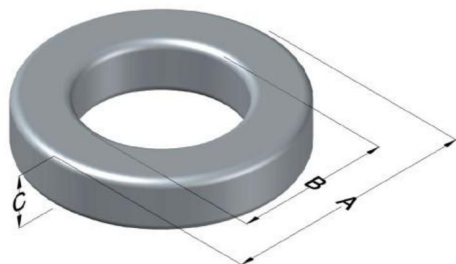

Kool M μ MAX Permeability (μ)	A_L (nH/T ²)	Core Marking			Coating Color
		Lot Number	Part Number	Inductance Grade	
14	19 \pm 8%	XXXXXX	79257A7	N/A	Black

Dimensions					Packaging
Uncoated		Coated Limits			
	(mm)	(in)	(mm)	(in)	
OD (A)	39.88	1.570	40.77	1.605	Cardboard cut-outs Box Qty = 180 Pcs
ID (B)	24.13	0.950	23.32	0.918	
HT (C)	14.48	0.570	15.37	0.605	

Electrical Characteristics			Physical Characteristics						
Watt Loss @ 100kHz, 100mT (max, mW/cm ³)	DC Bias		Voltage Breakdown wire-to-wire min (V _{AC})	Break Strength (min, kg)	Window Area, W _A (mm ²)	Cross Section, A _e (mm ²)	Path Length, L _e (mm)	Volume V _e (mm ³)	Weight (g)
	80%	50%							
1200	225	420	3000	126	427	107	98.4	10500	66.2

Winding Information					Temperature Rating	
Winding Length per Turn			Wound Coil Dimensions (mm)		Curie Temp (°C):	500 °C
Winding Factor	(mm)	Winding Factor	(mm)	40% Winding Factor	OD	44.3
0%	48.2	40%	60.2	Completely Full Window	HT	22.4
20%	54.3	45%	62.1		Max OD	56.4
25%	55.8	50%	63.7	Surface Area (mm ²)	Max HT	35.2
30%	57.0	60%	67.3		Unwound Core:	4800
35%	58.8	70%	71.5		40% Wound:	7300

