0079554A7

110 Delta Drive
Pittsburgh, PA 15238
NAFTA Sales: (1)800-245-3984
HK Sales : (852)3102-9337
magnetics@spang.com
www.mag-inc.com

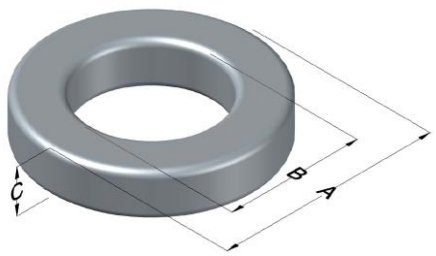

Kool Mμ MAX Permeability (μ)	A_L (nH/T²)	Core Marking			Coating Color
		Lot Number	Part Number	Inductance Grade	
19	20 ± 8%	XXXXXX	77554A7	N/A	Black

Dimensions	Uncoated		Coated Limits			Packaging
	(mm)	(in)	(mm)	(in)		
OD (A)	32.80	1.291	33.66	1.325	max	Cardboard cut-outs Box Qty= 250 pcs
ID (B)	20.1	0.791	19.4	0.766	min	
HT (C)	10.7	0.420	11.5	0.450	max	

Electrical Characteristics			Physical Characteristics						
Watt Loss @ 50 kHz, 100mT max (mW/cm³)	DC Bias min (A·T/cm)		Voltage Breakdown wire to wire min (V_{AC})	Break Strength min (kg)	Window Area W_A(mm²)	Cross Section A_e (mm²)	Path Length L_e (mm)	Volume V_e (mm³)	Weight (g)
	80%	50%							
325	185	375	2000	49	297	65.6	81.4	5340	32

Winding Information							Temperature Rating
Winding Length Per Turn				Wound Coil Dimensions (mm)			Curie Temp: 500˚C
Winding Factor	(mm)	Winding Factor	(mm)	40% Winding Factor	OD	36.8	Coating Temp (Continuous up to): 200˚C
					HT	17.8	
0%	37.4	40%	47.2	Completely Full Window	Max OD	46.7	Notes:
20%	42.4	45%	48.8		Max HT	28.0	
25%	43.5	50%	50.1	Surface Area (mm²)			
30%	44.7	60%	53.2	Unwound Core		3,100	
35%	46.1	70%	56.7	40% Winding Factor		4,900	

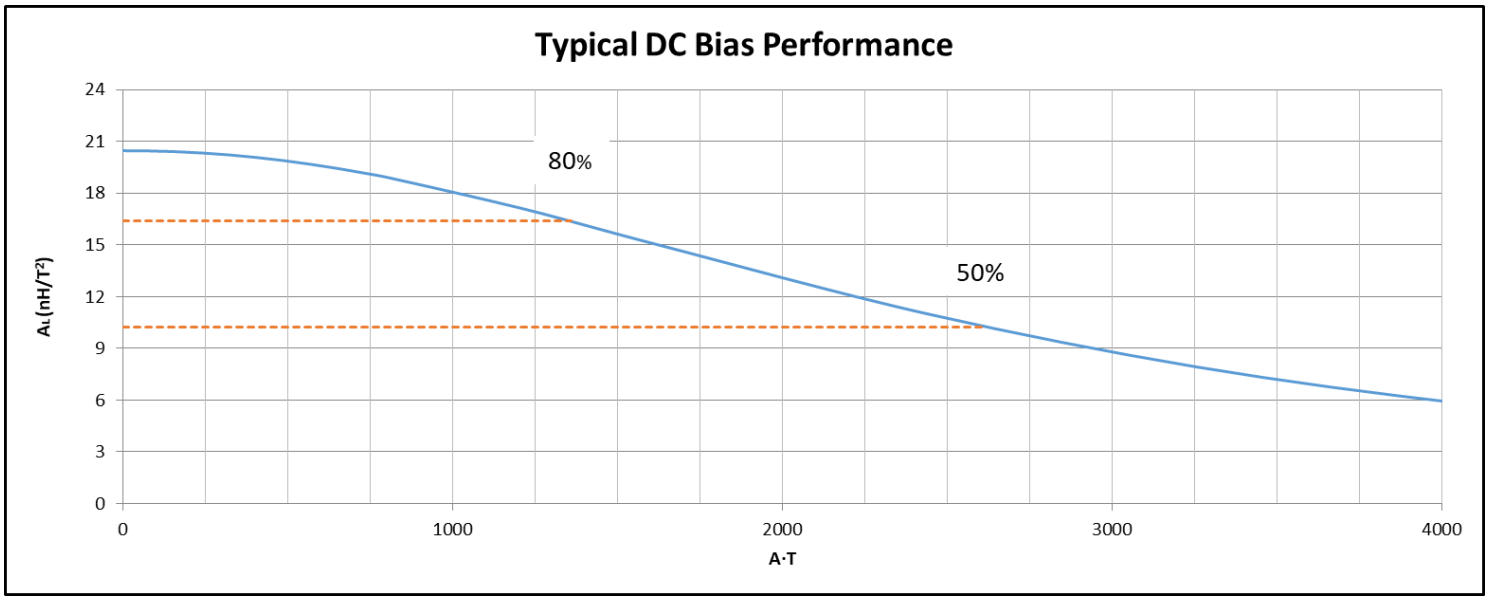

Revision 6/28/2018