




0079735A7

110 Delta Drive
 Pittsburgh, PA 15238
 NAFTA Sales: (1)800-245-3984
 HK Sales : (852)3102-9337
 magnetics@spang.com
 www.mag-inc.com

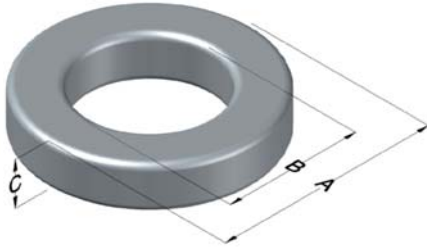

| Kool M μ MAX Permeability (μ) | A _L (nH/T ²) | Core Marking | | | Coating Color |
|---|-------------------------------------|--------------|-------------|------------------|---------------|
| | | Lot Number | Part Number | Inductance Grade | |
| 26 | 88 ± 8% | XXXXXX | 79735A7 | N/A | Black |

| Dimensions | Uncoated | | Coated Limits | | | Packaging |
|------------|----------|-------|---------------|-------|-----|---------------------------------------|
| | (mm) | (in) | (mm) | (in) | | |
| OD (A) | 74.10 | 2.917 | 75.01 | 2.953 | max | Cardboard cut-outs Box Qty= 24 pcs |
| ID (B) | 45.30 | 1.783 | 44.39 | 1.748 | min | |
| HT (C) | 35.00 | 1.378 | 35.92 | 1.414 | max | |

| Electrical Characteristics | | | Physical Characteristics | | | | | | |
|--|----------------------|-----|---|-------------------------|---|---|---------------------------------|--|------------|
| Watt Loss @ 100 kHz, 100mT max (mW/cm ³) | DC Bias min (A-T/cm) | | Voltage Breakdown wire to wire min (V _{AC}) | Break Strength min (kg) | Window Area W _A (mm ²) | Cross Section A _e (mm ²) | Path Length L _e (mm) | Volume V _e (mm ³) | Weight (g) |
| | 80% | 50% | | | | | | | |
| 700 | 106 | 227 | 2000 | 113 | 1,550 | 497 | 184 | 91,400 | 530 |

| Winding Information | | | | | Temperature Rating | |
|-------------------------|------|----------------|------|---------------------------------|--------------------|--|
| Winding Length Per Turn | | | | Wound Coil Dimensions (mm) | | Curie Temp: 500°C |
| Winding Factor | (mm) | Winding Factor | (mm) | 40% Winding Factor | | Coating Temp (Continuous up to): 200°C |
| | | | | OD | 91.0 | Notes: |
| 0% | 102 | 40% | 125 | HT | 55.2 | |
| | | | | Max OD | 102 | |
| 20% | 114 | 45% | 129 | Max HT | 65.7 | |
| 25% | 117 | 50% | 132 | Surface Area (mm ²) | | |
| 30% | 119 | 60% | 139 | Unwound Core | 19,000 | |
| 35% | 122 | 70% | 147 | 40% Winding Factor | 33,000 | |

