




# 00F1808E040

110 Delta Drive  
 Pittsburgh, PA 15238  
 NAFTA Sales: (1)800-245-3984  
 HK Sales : (852)3102-9337  
 magnetics@spang.com  
 www.mag-inc.com

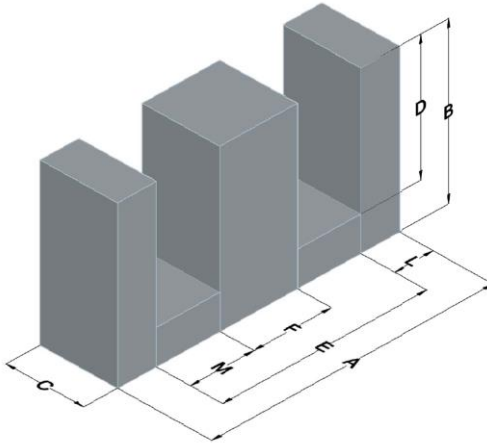

Kool M $\mu$ Hf Permeability ( $\mu$ )	A <sub>L</sub> (nH/T <sup>2</sup> )	Core Marking	
		Lot Number	Part Number
40	35 ± 8%	XXXXXX	F1808E040

	Dimensions		Tolerance (±)			Packaging
	(mm)	(in)	(mm)	(in)		
A	19.30	0.760	0.30	0.012		Est. Box Qty= 5700 Pcs
B	8.10	0.319	0.18	0.007		
C	4.78	0.188	0.15	0.006		
D	5.54	0.218	-	-	Min	Available Hardware
E	13.92	0.548	-	-	Min	PCB1808B1
F	4.78	0.188	0.13	0.005		00B180801
L	2.39	0.094	-	-	Nom	
M	4.65	0.183	-	-	Min	

Electrical Characteristics			Physical Characteristics					
Watt Loss @ 100 kHz, 100mT max (mW/cm <sup>3</sup> )	DC Bias min (oersteds)		Break Strength Min (kg)	Window Area W <sub>a</sub> (mm <sup>2</sup> )	Cross Section A <sub>e</sub> (mm <sup>2</sup> )	Path Length L <sub>e</sub> (mm)	Volume V <sub>e</sub> (mm <sup>3</sup> )	Est. Weight (Ea. Piece) (g)
	80%	50%						
350	60	135	2.3	51.5	22.8	40.1	914	3

Notes:	Temperature Rating
	Curie Temp: 500 °C

