




# 00G7228E060

110 Delta Drive  
 Pittsburgh, PA 15238  
 NAFTA Sales: (1)800-245-3984  
 HK Sales : (852)3102-9337  
 magnetics@spang.com  
 www.mag-inc.com

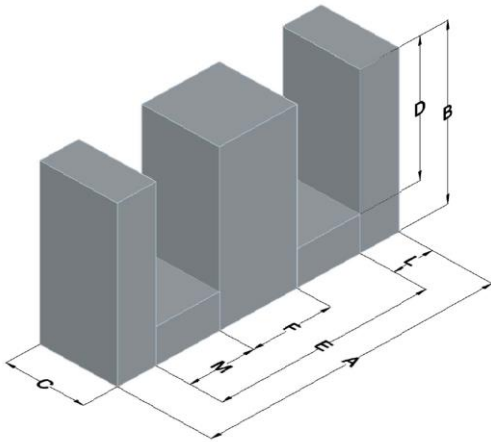

Edge Permeability ( $\mu$ )	$A_L$ (nH/T <sup>2</sup> )	Core Marking	
		Lot Number	Part Number
60	235 $\pm$ 8%	XXXXXX	G7228E060

	Dimensions		Tolerance ( $\pm$ )			Packaging
	(mm)	(in)	(mm)	(in)		
<b>A</b>	72.39	2.849	1.09	0.043		Est. Box Qty= 84 Pcs
<b>B</b>	27.94	1.100	0.51	0.020		
<b>C</b>	19.05	0.750	0.38	0.015		
<b>D</b>	17.75	0.699	-	-	Min	Available Hardware
<b>E</b>	52.63	2.071	-	-	Min	00B722801
<b>F</b>	19.05	0.750	0.38	0.015		
<b>L</b>	9.53	0.375	-	-	Nom	
<b>M</b>	16.89	0.665	-	-	Min	

Electrical Characteristics			Physical Characteristics					
Watt Loss @ 100 kHz, 100mT max (mW/cm <sup>3</sup> )	DC Bias min (oersteds)		Break Strength Min (kg)	Window Area $W_a$ (mm <sup>2</sup> )	Cross Section $A_e$ (mm <sup>2</sup> )	Path Length $L_e$ (mm)	Volume $V_e$ (mm <sup>3</sup> )	Est. Weight (Ea. Piece) (g)
525	80%	50%	41	600	368	137	50,400	197.9
	115	175						

Notes:	Temperature Rating
	Curie Temp: 500 °C

