




00K2510E026

110 Delta Drive
 Pittsburgh, PA 15238
 NAFTA Sales: (1)800-245-3984
 HK Sales : (852)3102-9337
 magnetics@spang.com
 www.mag-inc.com

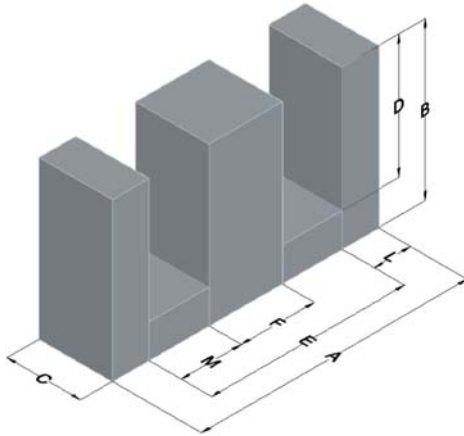

Kool M μ Permeability (μ)	A _L (nH/T ²)	Core Marking	
		Lot Number	Part number
26	39 ± 8%	XXXXXX	K2510E026

	Dimensions		Tolerance (±)			Packaging
	(mm)	(in)	(mm)	(in)		
A	25.4	1.000	0.381	0.015		Box Qty= 1,728 pcs
B	9.53	0.375	0.178	0.007		
C	6.35	0.250	0.102	0.004		
D	6.22	0.245	-	-	Min	Available Hardware
E	18.7	0.740	-	-	Min	PCB2510V1
F	6.35	0.250	0.127	0.005		PCB2510V2
L	3.18	0.125	-	-	Nom	00B251001
M	6.24	0.246	-	-	Min	

Electrical Characteristics		Physical Characteristics					
Watt Loss @ 100 kHz, 100mT max(mW/cm ³)	DC Bias min (A·T/cm)	Break Strength min (kg)	Window Area W _A (mm ²)	Cross Section A _e (mm ²)	Path Length L _e (mm)	Volume V _e (mm ³)	Weight (Ea. Peice) (g)
1800	80%	5	77.6	38.5	48.5	1870	6.8
	75.7						

Notes:	Temperature Rating
	Curie Temp: 500°C

