




**00K3515E060**

110 Delta Drive  
 Pittsburgh, PA 15238  
 NAFTA Sales: (1)800-245-3984  
 HK Sales : (852)3102-9337  
 magnetics@spang.com  
 www.mag-inc.com

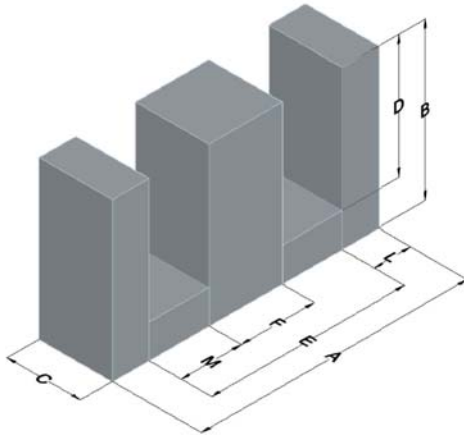

Kool M $\mu$ Permeability ( $\mu$ )	A <sub>L</sub> (nH/T <sup>2</sup> )	Core Marking	
		Lot Number	Part number
60	102 ± 8%	XXXXXX	K3515E060

	Dimensions		Tolerance (±)			Packaging
	(mm)	(in)	(mm)	(in)		
A	34.54	1.360	0.508	0.020		Box Qty= 840 pcs
B	14.2	0.557	0.229	0.009		
C	9.35	0.368	0.178	0.007		
D	9.60	0.378	-	-	Min	Available Hardware
E	25.2	0.995	-	-	Min	PCB3515M1
F	9.32	0.367	0.203	0.008		PCB3515M2
L	4.45	0.175	-	-	Nom	00B351501
M	7.87	0.310	-	-	Min	

Electrical Characteristics		Physical Characteristics					
Watt Loss @ 100 kHz, 100mT max(mW/cm <sup>3</sup> )	DC Bias min (A·T/cm)	Break Strength min (kg)	Window Area W <sub>A</sub> (mm <sup>2</sup> )	Cross Section A <sub>e</sub> (mm <sup>2</sup> )	Path Length L <sub>e</sub> (mm)	Volume V <sub>e</sub> (mm <sup>3</sup> )	Weight (Ea. Piece) (g)
1245	80%	9	151	84.0	69.4	5830	17
	26.7						

Notes:	Temperature Rating
	Curie Temp: 500°C

