




00K3515E090

110 Delta Drive
 Pittsburgh, PA 15238
 NAFTA Sales: (1)800-245-3984
 HK Sales : (852)3102-9337
 magnetics@spang.com
 www.mag-inc.com

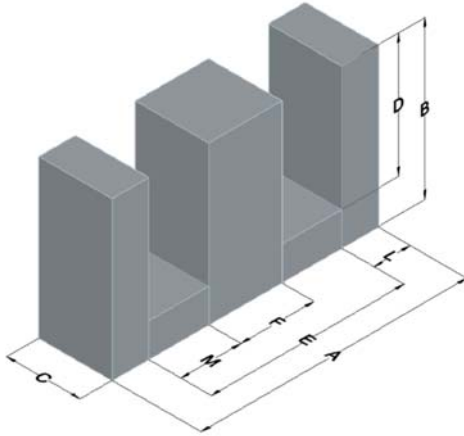

Kool M μ Permeability (μ)	A _L (nH/T ²)	Core Marking	
		Lot Number	Part number
90	146 ± 8%	XXXXXX	K3515E090

	Dimensions		Tolerance (±)			Packaging
	(mm)	(in)	(mm)	(in)		
A	34.54	1.360	0.508	0.020		Box Qty= 840 pcs
B	14.2	0.557	0.229	0.009		
C	9.35	0.368	0.178	0.007		
D	9.60	0.378	-	-	Min	Available Hardware
E	25.2	0.995	-	-	Min	PCB3515M1
F	9.32	0.367	0.203	0.008		PCB3515M2
L	4.45	0.175	-	-	Nom	00B351501
M	7.87	0.310	-	-	Min	

Electrical Characteristics		Physical Characteristics						
Watt Loss @ 100 kHz, 100mT max(mW/cm ³)	DC Bias min (A-T/cm)	Break Strength min (kg)	Window Area W _A (mm ²)	Cross Section A _e (mm ²)	Path Length L _e (mm)	Volume V _e (mm ³)	Weight (Ea. Piece) (g)	Curie Temp
902	80% 18.1	9	151	84.0	69.4	5830	17	500°C

Notes:	Temperature Rating
	Curie Temp: 500°C

