




00K8024E060

110 Delta Drive
 Pittsburgh, PA 15238
 NAFTA Sales: (1)800-245-3984
 HK Sales : (852)3102-9337
 magnetics@spang.com
 www.mag-inc.com

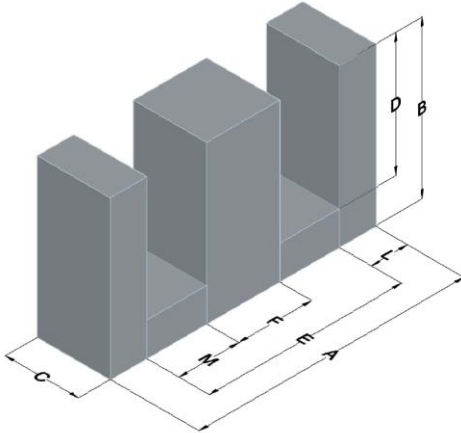

Kool M μ Permeability (μ)	A _L (nH/T ²)	Core Marking	
		Lot Number	Part number
60	370 ± 8%	XXXXXX	K8024E060

	Dimensions		Tolerance (±)			Packaging
	(mm)	(in)	(mm)	(in)		
A	80.01	3.150	1.19	0.047		TBD
B	24.05	0.950	0.635	0.025		
C	29.72	1.170	0.381	0.015		
D	14.02	0.552	-	-	Min	Available Hardware
E	59.28	2.334	-	-	Min	TBD
F	19.8	0.780	0.381	0.015		
L	9.91	0.390	-	-	Nom	
M	19.8	0.780	-	-	Min	

Electrical Characteristics		Physical Characteristics					
Watt Loss @ 100 kHz, 100mT max(mW/cm ³)	DC Bias min (A·T/cm)	Break Strength min (kg)	Window Area W _A (mm ²)	Cross Section A _e (mm ²)	Path Length L _e (mm)	Volume V _e (mm ³)	Weight (Ea. Piece) (g)
1250	80% 35.7	TBD	TBD	600	131.4	78,840	440

Notes:	Temperature Rating
	Curie Temp: 500°C

*AL and Physical Characteristics are estimated, will be confirmed after tooling is built