




00L4317E040

110 Delta Drive
 Pittsburgh, PA 15238
 NAFTA Sales: (1)800-245-3984
 HK Sales : (852)3102-9337
 magnetics@spang.com
 www.mag-inc.com

PRELIMINARY

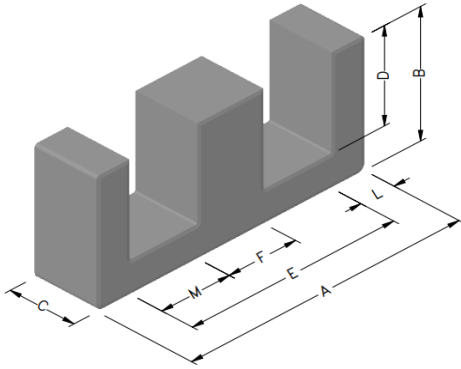

Kool M μ Ultra Permeability (μ)	AL (nH/T ²)	Core Marking	
		Lot Number	Part Number
40	119 \pm 8%	XXXXXX	L4317E040

	Dimensions		Tolerance (\pm)			Packaging
	(mm)	(in)	(mm)	(in)		
A	40.87	1.61	0.61	0.024		Est. Box Qty= 270 Pcs
B	16.51	0.65	0.28	0.011		
C	12.52	0.49	0.18	0.007		
D	10.39	0.41	-			Available Hardware
E	28.32	1.11	-			PCB4317M1
F	12.52	0.49	0.20	0.008		
L	6.05	0.24	-			
M	7.87	0.310	-	-	Min	

Electrical Characteristics			Physical Characteristics					
Watt Loss @ 100 kHz, 100mT max (mW/cm ³)	DC Bias min (oersteds)		Break Strength Min (kg)	Window Area W _a (mm ²)	Cross Section A _e (mm ²)	Path Length L _e (mm)	Volume V _e (mm ³)	Est. Weight (Ea. Piece) (g)
	80%	50%						
275	50	115	16	164	152	77.5	11,800	34.6

Notes:	Temperature Rating
	Curie Temp: 500

