




# 00X4020E040

110 Delta Drive  
 Pittsburgh, PA 15238  
 NAFTA Sales: (1)800-245-3984  
 HK Sales : (852)3102-9337  
 magnetics@spang.com  
 www.mag-inc.com

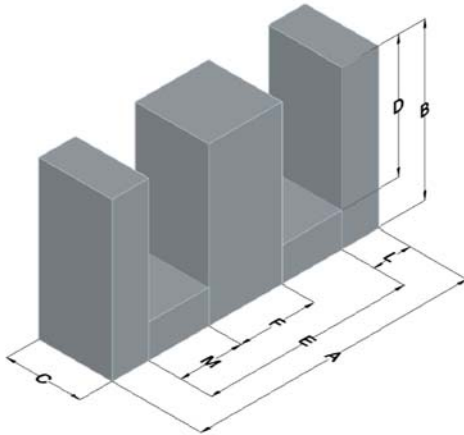

XF <sub>Lux</sub> Permeability (μ)	A <sub>L</sub> (nH/T <sup>2</sup> )	Core Marking	
		Lot Number	Part number
40	108 ± 8%	XXXXXX	X4020E040

	Dimensions		Tolerance (±)			Packaging
	(mm)	(in)	(mm)	(in)		
<b>A</b>	42.85	1.687	0.635	0.025		Box Qty= 192 pcs
<b>B</b>	21.1	0.830	0.330	0.013		
<b>C</b>	15.4	0.608	0.254	0.010		
<b>D</b>	14.9	0.587	-	-	Min	<b>Available Hardware</b>
<b>E</b>	30.35	1.195	-	-	Min	<b>PCB4020N1</b>
<b>F</b>	11.9	0.468	0.254	0.010		<b>00B402021</b>
<b>L</b>	5.94	0.234	-	-	Nom	
<b>M</b>	9.27	0.365	-	-	Min	

Physical Characteristics					
Break Strength min (kg)	Window Area W <sub>A</sub> (mm <sup>2</sup> )	Cross Section A <sub>e</sub> (mm <sup>2</sup> )	Path Length L <sub>e</sub> (mm)	Volume V <sub>e</sub> (mm <sup>3</sup> )	Weight (g)
18	276	183	98.4	18,000	48

Notes:	<b>Temperature Rating</b>
	Curie Temp: 700°C

