




# 00X5528E060

110 Delta Drive  
 Pittsburgh, PA 15238  
 NAFTA Sales: (1)800-245-3984  
 HK Sales : (852)3102-9337  
 magnetics@spang.com  
 www.mag-inc.com

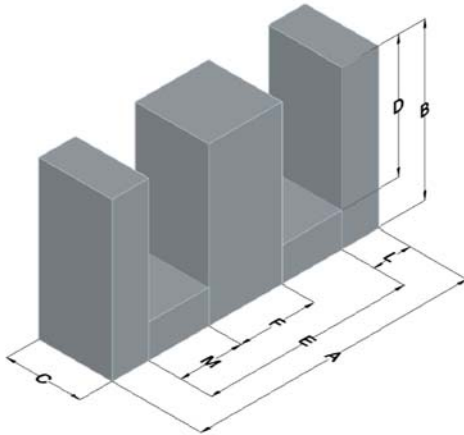

XF <sub>Lux</sub> Permeability (μ)	A <sub>L</sub> (nH/T <sup>2</sup> )	Core Marking	
		Lot Number	Part number
60	219 ± 8%	XXXXXX	X5528E060

	Dimensions		Tolerance (±)			Packaging
	(mm)	(in)	(mm)	(in)		
<b>A</b>	54.86	2.160	0.813	0.032		Box Qty= 112 pcs
<b>B</b>	27.56	1.085	0.406	0.016		
<b>C</b>	20.6	0.812	0.381	0.015		
<b>D</b>	18.5	0.729	-	-	Min	<b>Available Hardware</b>
<b>E</b>	37.49	1.476	-	-	Min	<b>PCB5528WC</b>
<b>F</b>	16.8	0.660	0.381	0.015		<b>00B5528B1</b>
<b>L</b>	8.38	0.330	-	-	Nom	
<b>M</b>	10.2	0.405	-	-	Min	

Physical Characteristics					
Break Strength min (kg)	Window Area W <sub>A</sub> (mm <sup>2</sup> )	Cross Section A <sub>e</sub> (mm <sup>2</sup> )	Path Length L <sub>e</sub> (mm)	Volume V <sub>e</sub> (mm <sup>3</sup> )	Weight (Ea. Piece) (g)
32	380	350	123	43,100	150

Notes:	<b>Temperature Rating</b>
	Curie Temp: 700°C

