




00X5530E040

110 Delta Drive
 Pittsburgh, PA 15238
 NAFTA Sales: (1)800-245-3984
 HK Sales : (852)3102-9337
 magnetics@spang.com
 www.mag-inc.com

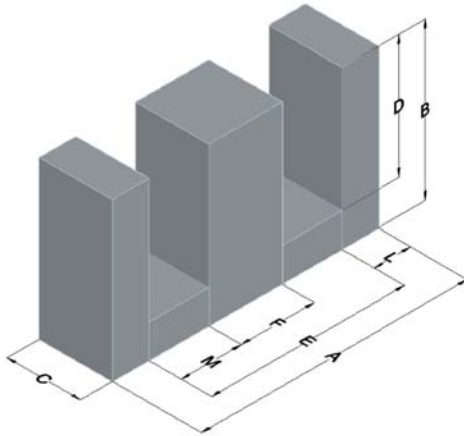

XFLux Permeability (μ)	A _L (nH/T ²)	Core Marking	
		Lot Number	Part number
40	187 ± 8%	XXXXXX	X5530E040

	Dimensions		Tolerance (±)			Packaging
	(mm)	(in)	(mm)	(in)		
A	54.86	2.160	0.813	0.032		Box Qty= 96 pcs
B	27.56	1.085	0.406	0.016		
C	24.6	0.969	0.381	0.015		
D	18.5	0.729	-	-	Min	Available Hardware
E	37.49	1.476	-	-	Min	PCB5530FA
F	16.8	0.660	0.381	0.015		
L	8.38	0.330	-	-	Nom	
M	10.2	0.405	-	-	Min	

Physical Characteristics					
Break Strength min (kg)	Window Area W _A (mm ²)	Cross Section A _e (mm ²)	Path Length L _e (mm)	Volume V _e (mm ³)	Weight (g)
39	380	417	123	51,400	283

Notes:	Temperature Rating
	Curie Temp: 700°C

