




Specification for:

0F41506TC

110 Delta Drive
 Pittsburgh, PA 15238
 Phone: 412/696-1333
 Fax: 412/696-0333
 Email:magnetics@spang.com

DIMENSIONS

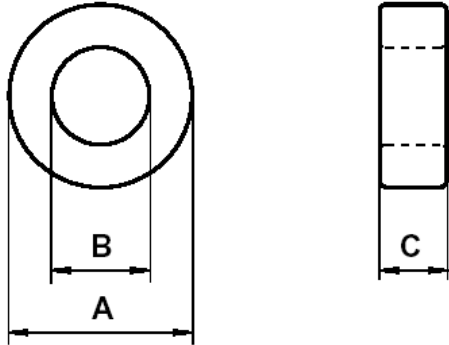

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	13.2	12.93	13.47
I.D. (B)	7.37	7.11	7.63
Ht. (C)	3.96	3.83	4.09

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
11.2	30.6	343

INDUCTANCE

AL value (nH/T ²)	Test conditions
1334 ± 20%	10 kHz, 0.5 mT (For N = 5, use 0.5 mA), 25°C

CORE LOSSES

P _L max	Production lot limit Max avg	Test conditions
75.5 mW (220 mW/cm ³)	68.6 mW (200 mW/cm ³)	25 kHz, 200 mT, 100°C
-	-	-

COATING

Uncoated

NOTE

Spec. Modifications	Previous	Revised
2005.08.30	Losses: General F Material	Losses: Detail as indicated