


DIMENSIONS

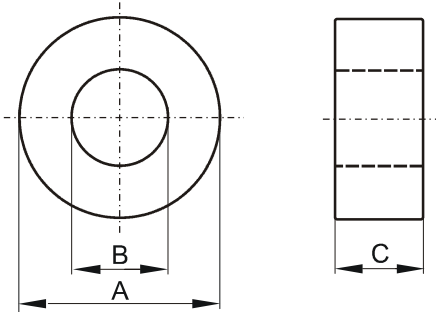

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	38.1	37.33	38.87
I.D. (B)	19.0	18.28	19.72
Ht. (C)	6.35	6.17	6.53
Eff. Parameters			
Ae mm²	le mm	Ve mm³	
58.3	82.9	4826	

INDUCTANCE

AL value (nH/T ²)	Test conditions
2640 ± 20%	10 kHz, 0.5 mT (For N=5, use 1.3 mA), 25°C

CORE LOSSES

P _i max	Production lot limit Max avg	Test conditions
< 1.06 W (< 220 mW/cm ³)	< 0.97 W (< 200 mW/cm ³)	25 kHz, 200 mT, 100 °C

COATING

Uncoated

NOTE

Spec. modifications	Previous	Revised
2007-06-05	Losses: General F material	Losses: Detail as indicated