




Specification for:
0F44932TC

110 Delta Drive
Pittsburgh, PA 15238
Phone: 412/696-1333
Fax: 412/696-0333
Email:magnetics@spang.com

DIMENSIONS

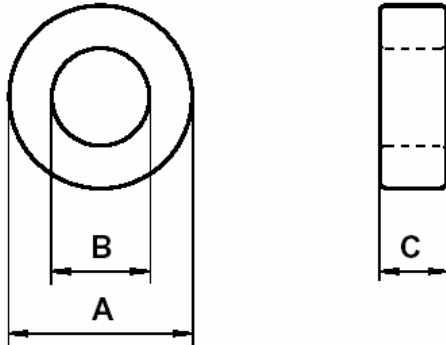

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	49.1	48.36	49.84
I.D. (B)	33.8	33.07	34.53
Ht. (C)	31.3	30.34	32.26

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
237	127	30116

INDUCTANCE

AL value (nH/T ²)	Test conditions
7080 ± 20%	10 kHz, 0.5 mT (For N = 5, use 0.45 mA), 25°C

CORE LOSSES

P _L max	Production lot limit Max avg	Test conditions
7.3 W (242 mW/cm ³)	6.6 W (220 mW/cm ³)	25 kHz, 200 mT, 100°C
-	-	-

COATING

Uncoated

NOTE

Spec. Modifications	Previous	Revised
2006.01.14	Bare Nom Ht = 31.8 Losses: General F Material	Bare Nom Ht = 31.3 Losses: Detail as indicated