




Specification for:
0F46113TC

110 Delta Drive
Pittsburgh, PA 15238
Phone: 412/696-1333
Fax: 412/696-0333
Email:magnetics@spang.com

DIMENSIONS

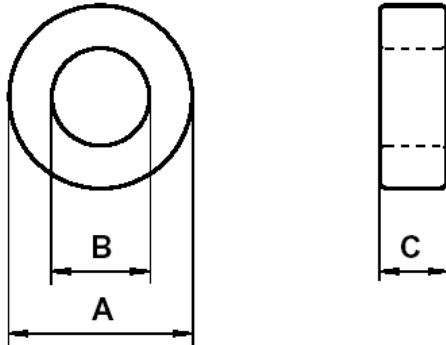

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	61.0	60.15	61.85
I.D. (B)	35.6	34.67	36.53
Ht. (C)	12.7	12.44	12.96

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
157.4	144.6	22774

INDUCTANCE

AL value (nH/T ²)	Test conditions
4107 ± 20%	10 kHz, 0.5 mT (For N = 5, use 0.45 mA), 25°C

CORE LOSSES

P _L max	Production lot limit Max avg	Test conditions
5.0 W (220 mW/cm ³)	4.5 W (200 mW/cm ³)	25 kHz, 200 mT, 100°C
-	-	-

COATING

Uncoated

NOTE

Spec. Modifications	Previous	Revised
2006.01.14	Losses: General F Material	Losses: Detail as indicated