




Specification for:
0J40200TC

110 Delta Drive
Pittsburgh, PA 15238
Phone: 412/696-1333
Fax: 412/696-0333
Email: magnetics@spang.com

DIMENSIONS

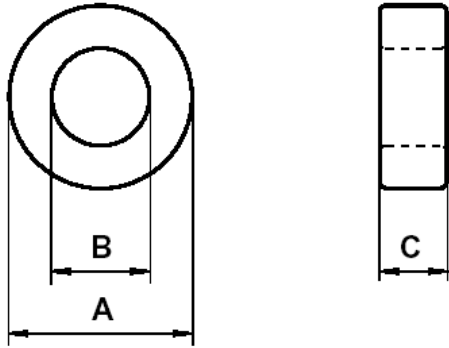

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	2.54	2.33	2.75
I.D. (B)	1.27	1.06	1.48
Ht. (C)	1.27	1.09	1.45

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
0.77	5.5	4.3

INDUCTANCE

A _L value (nH/T ²)	Test conditions	
875 ± 20%	10 kHz	0.5 mT (For N = 1, use 0.26 mA), 25°C
≥ 0.9 x A _L @ 10 kHz	200 kHz	

ELECTRICAL LOSSES

tan δ / μ _i	Test conditions
≤ 12·10 ⁻⁶	100 kHz, 0.5 mT , 25°C

COATING

Uncoated

NOTE

Spec. Modifications	Previous	Revised
2007.01.09	LF: General J Material	LF: Detail as indicated
	A _L value up to 200 kHz	A _L at 200 kHz ≥ 0.9 x A _L at 10 kHz