


DIMENSIONS

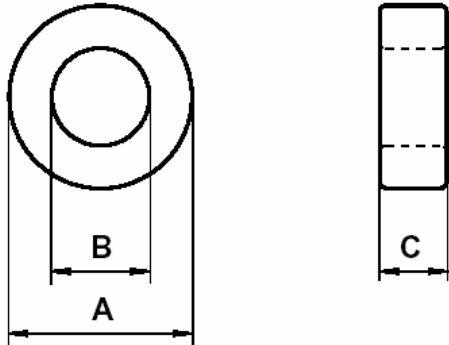

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	12.7	12.44	12.96
I.D. (B)	7.14	6.88	7.4
Ht. (C)	6.35	6.17	6.53

Eff. Parameters		
A_e mm ²	l_e mm	V_e mm ³
17.1	29.5	506.7

INDUCTANCE

A_L value (nH/T ²)	Test conditions	
3612 ± 20%	10 kHz	0.5 mT (For N = 1, use 1.38 mA), 25°C
≥ 0.9 x A_L @ 10 kHz	200 kHz	

ELECTRICAL LOSSES

$\tan \delta / \mu_i$	Test conditions
≤ 12·10 ⁻⁶	100 kHz, 0.5 mT, 25°C

COATING

Uncoated

NOTE

Spec. Modifications	Previous	Revised
2006.01.15	LF: General J Material	LF: Detail as indicated
	A_L value up to 200 kHz	A_L at 200 kHz ≥ 0.9 x A_L at 10 kHz