




Specification for:  
**0J41450TC**

110 Delta Drive  
Pittsburgh, PA 15238  
Phone: 412/696-1333  
Fax: 412/696-0333  
Email: magnetics@spang.com

**DIMENSIONS**

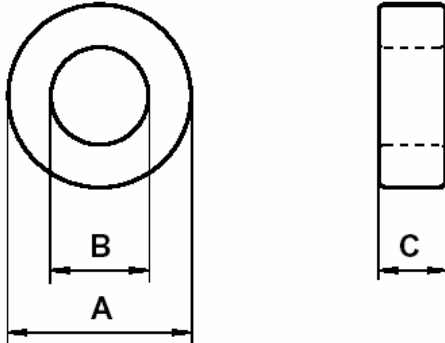

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	14.00	13.75	14.25
I.D. (B)	8.99	8.73	9.27
Ht. (C)	5.00	4.86	5.14

Eff. Parameters		
$A_e$ mm <sup>2</sup>	$l_e$ mm	$V_e$ mm <sup>3</sup>
12.3	35.0	430

**INDUCTANCE**

$A_L$ value (nH/T <sup>2</sup> )	Test conditions	
2160 ± 20%	10 kHz	0.5 mT (For N = 1, use 1.7 mA), 25°C
≥ 0.9 x $A_L$ @ 10 kHz	200 kHz	

**ELECTRICAL LOSSES**

Tan $\delta$ / $\mu_i$	Test conditions
≤ 12 · 10 <sup>-6</sup>	100 kHz, 0.5 mT, 25°C

**COATING**

Uncoated
----------

**NOTE**

Spec. Modifications	Previous	Revised
2006.01.09	$A_L$ value up to 200 kHz LF: General J Material	$A_L$ at 200 kHz ≥ 0.9 x $A_L$ at 10 kHz LF: Detail as indicated