


**DIMENSIONS**

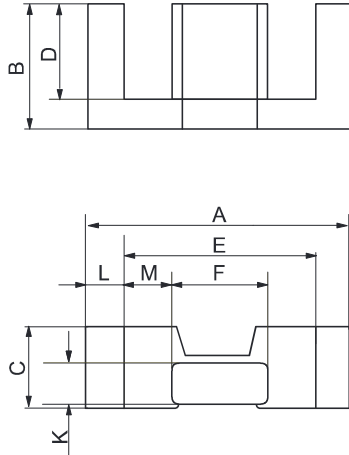

(mm)	Nominal:	Tol. min.:	Tol. max.:
<b>A</b>	20.0	-0.55	+ 0.55
<b>B</b>	10.0	-0.15	+ 0.15
<b>C</b>	6.65	-0.15	+ 0.15
<b>D</b>	7.7	-0.25	+ 0.25
<b>E</b>	15.4	-0.5	+ 0.5
<b>F</b>	8.9	-0.2	+ 0.2
<b>K</b>	3.6	-0.15	+ 0.15
<b>L</b>	2.3 Ref.		
<b>M</b>	3.25 Ref.		
<b>Eff. Parameters</b>			
<b>Ae mm<sup>2</sup></b>	<b>Amin mm<sup>2</sup></b>	<b>le mm</b>	<b>Ve mm<sup>3</sup></b>
31.0	29.0	47.0	1460

**INDUCTANCE**

<b>AL value (nH)</b>	<b>Test conditions</b>
Nom: 2696 Min.: 2022	10 kHz, < 0.5 mT, 25 °C

**MARKING**

No marking
------------

**LOSS FACTOR**

<b><math>\tan \delta/\mu</math> (<math>\times 10^{-6}</math>)</b>	<b>Test conditions</b>
< 20	100 kHz, < 0.25 mT, 25 °C