


DIMENSIONS

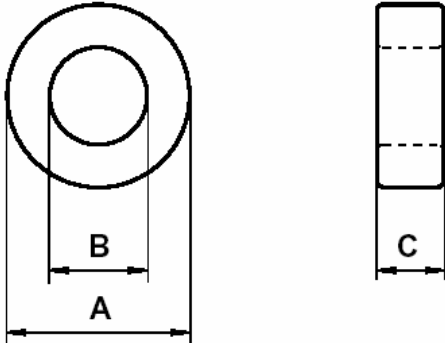

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	22.1	21.72	22.48
I.D. (B)	13.7	13.33	14.07
Ht. (C)	12.7	12.44	12.96

Eff. Parameters		
A_e mm ²	l_e mm	V_e mm ³
52.3	54.1	2834

INDUCTANCE

A_L value (nH/T ²)	Test conditions	
6040 ± 20%	10 kHz	0.5 mT (For N = 1, use 2,5 mA), 25°C
≥ 0.9 x A_L @ 10 kHz	200 kHz	

ELECTRICAL LOSSES

$\tan \delta / \mu_i$	Test conditions
≤ 12 · 10 ⁻⁶	100 kHz, 0.5 mT, 25°C

COATING

Uncoated

NOTE

Spec. Modifications	Previous	Revised
2006.01.05	LF: General J Material	LF: Detail as indicated