


DIMENSIONS

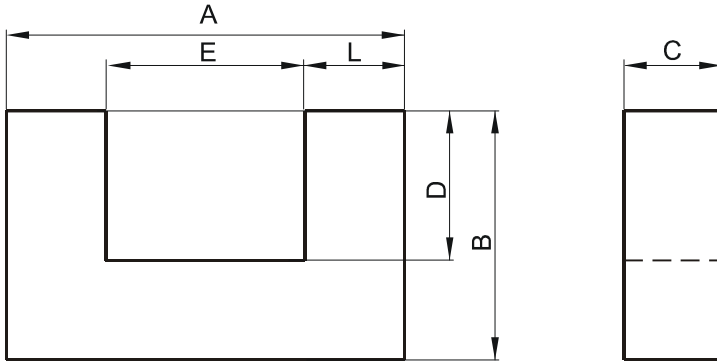

(mm)	Nominal:	Tol. min.:	Tol. max.:
A	25.4	-0.51	+ 0.51
B	15.9 Ref.		
C	6.35	-0.12	+ 0.12
D	9.27 Min.		
E	12.7 Ref.		
L	6.45	-0.15	+ 0.15
Eff. Parameters			
Ae mm ²	Amin mm ²	le mm	Ve mm ³
40.4	40.4	83.4	3370

INDUCTANCE

AL value (nH/T ²)	Test conditions
Nom: 2507 Min.: 1880	10 kHz, < 0.5 mT, 25 °C

MARKING

No marking

LOSS FACTOR

$\tan \delta/\mu$	Test conditions
< 20 · 10 ⁻⁶	100 kHz, < 0.25 mT, 25 °C

NOTE

Spec. modifications	Previous	Revised
2005-06-22	L=6.35±0.13 Loss factor: General J material	L=6.45±0.15 Loss factor: Detail as indicated