




Specification for:
0J47313TC

110 Delta Drive
 Pittsburgh, PA 15238
 Phone: 412/696-1333
 Fax: 412/696-0333
 Email:magnetics@spang.com

DIMENSIONS

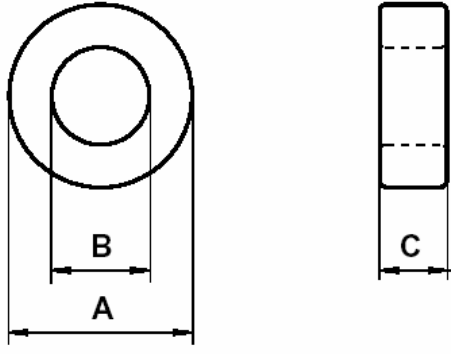

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	73.7	72.6	74.7
I.D. (B)	38.9	37.9	39.9
Ht. (C)	12.5	12.04	12.96

Eff. Parameters		
A_e mm ²	l_e mm	V_e mm ³
210	165	34771

INDUCTANCE

A_L value (nH/T ²)	Test conditions	
8140 ± 20%	10 kHz	0.5 mT (For N = 1, use 7.61 mA), 25°C
≥ 6105	150 kHz	

ELECTRICAL LOSSES

$\tan \delta / \mu_i$	Test conditions
≤ 20·10 ⁻⁶	100 kHz, 0.5 mT, 25°C

COATING

Uncoated

NOTE

Spec. Modifications	Previous	Revised
2005.07.08	Bare Nom Ht = 12.7 LF: General J Material	Bare Nom Ht = 12.5 LF & Freq Response: Detail as indicated