


**DIMENSIONS**

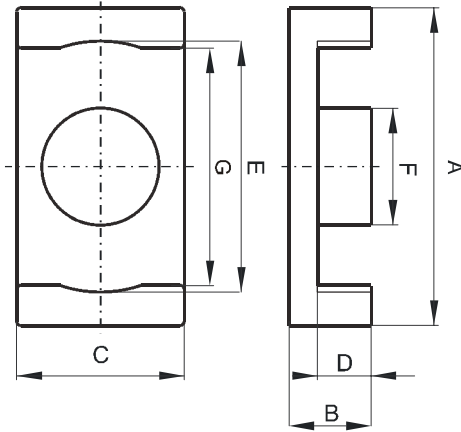

(mm)	Nominal:	Tol. min.:	Tol. max.:
<b>A</b>	9.5	-0.3	0.0
<b>B</b>	2.45	-0.05	+ 0.05
<b>C</b>	5.0	-0.2	0.0
<b>D</b>	1.6	0.0	+ 0.15
<b>E</b>	7.5	0.0	+ 0.4
<b>F</b>	3.5	-0.2	0.0
<b>G</b>	7.1	0.0	+ 0.35
<b>Eff. Parameters</b>			
<b>Ae mm<sup>2</sup></b>	<b>Amin mm<sup>2</sup></b>	<b>le mm</b>	<b>Ve mm<sup>3</sup></b>
8.47	7.6	14.2	120

**INDUCTANCE**

<b>AL value (nH/T<sup>2</sup>)</b>	<b>Test conditions</b>
525 ± 25%	10 kHz, < 0.5 mT, 25 °C

**MARKING**

No marking

**CORE LOSSES**

<b>P<sub>i</sub> max</b>	<b>Test conditions</b>
233 mW/cm <sup>3</sup> (0.028 W/set)	1000 kHz, 30 mT, 100 °C
Ref. 400 mW/cm <sup>3</sup> (0.048 W/set)	3000 kHz, 10 mT, 100 °C