


DIMENSIONS

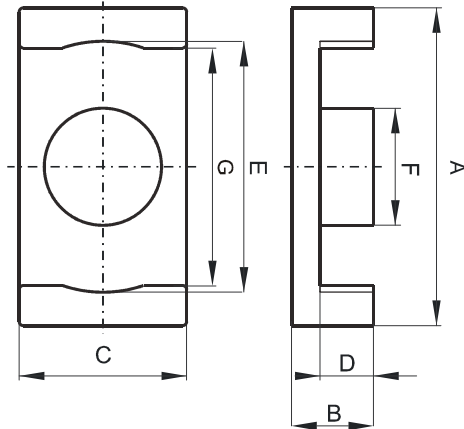

(mm)	Nominal:	Tol. min.:	Tol. max.:
A	11.0	-0.35	0.0
B	2.45	-0.05	+ 0.05
C	6.0	-0.2	0.0
D	1.5	0.0	+ 0.15
E	8.7	0.0	+ 0.3
F	4.25	-0.25	0.0
G	8.0	0.0	+ 0.2
Eff. Parameters			
Ae mm²	Amin mm²	le mm	Ve mm³
11.9	10.3	14.7	174

INDUCTANCE

MARKING

AL value (nH/T²)	Test conditions	No marking
610 ± 25%	10 kHz, < 0.5 mT, 25 °C	

CORE LOSSES

P_i max	Test conditions
230 mW/cm ³ (0.04 W/set)	1000 kHz, 30 mT, 100 °C
Ref. 400 mW/cm ³ (0.07 W/set)	3000 kHz, 10 mT, 100 °C