


DIMENSIONS

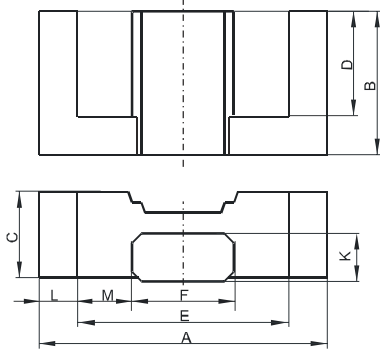

(mm)	Nominal:	Tol. min.:	Tol. max.:
A	12.5	-0.3	+ 0.3
B	6.2	-0.1	+ 0.1
C	3.5	-0.1	+ 0.1
D	4.55	-0.15	+ 0.15
E	9.0	-0.25	+ 0.25
F	5.4	-0.15	+ 0.15
K	2.0	-0.1	+ 0.1
L	1.75 Ref.		
M	1.8 Ref.		
Eff. Parameters			
Ae mm²	Amin mm²	le mm	Ve mm³
11.4	10.7	28.5	325

INDUCTANCE

AL value (nH/T²)	Test conditions
380 ± 25%	10 kHz, < 0.5 mT, 25 °C

MARKING

No marking

CORE LOSSES

P_i max	Test conditions
225 mW/cm ³ (0.073 W/set)	1000 kHz, 30 mT, 100 °C
Ref. 400 mW/cm ³ (0.13 W/set)	3000 kHz, 10 mT, 100 °C