


**DIMENSIONS**

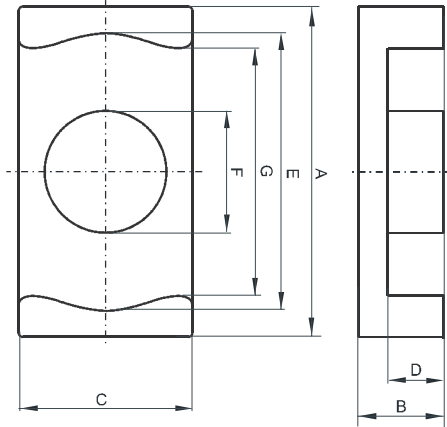

| (mm)                     | Nominal:                   | Tol. min.:   | Tol. max.:               |
|--------------------------|----------------------------|--------------|--------------------------|
| <b>A</b>                 | 12.8                       | -0.3         | + 0.3                    |
| <b>B</b>                 | 2.85                       | -0.08        | + 0.08                   |
| <b>C</b>                 | 8.7                        | -0.25        | + 0.25                   |
| <b>D</b>                 | 1.75                       | -0.13        | + 0.13                   |
| <b>E</b>                 | 11.2                       | -0.3         | + 0.3                    |
| <b>F</b>                 | 5.0                        | -0.15        | + 0.15                   |
| <b>G</b>                 | 9.05                       | -0.3         | + 0.3                    |
| <b>Eff. Parameters</b>   |                            |              |                          |
| <b>Ae mm<sup>2</sup></b> | <b>Amin mm<sup>2</sup></b> | <b>le mm</b> | <b>Ve mm<sup>3</sup></b> |
| 19.9                     | 19.2                       | 17.5         | 348                      |

**INDUCTANCE**

| <b>AL value (nH/T<sup>2</sup>)</b> | <b>Test conditions</b>  |
|------------------------------------|-------------------------|
| 950 ± 25%                          | 10 kHz, < 0.5 mT, 25 °C |

**MARKING**

No marking

**CORE LOSSES**

| <b>P<sub>i</sub> max</b>                 | <b>Test conditions</b>  |
|--|-------------------------|
| 230 mW/cm <sup>3</sup> (0.08 W/set)      | 1000 kHz, 30 mT, 100 °C |
| Ref. 400 mW/cm <sup>3</sup> (0.14 W/set) | 3000 kHz, 10 mT, 100 °C |