


DIMENSIONS

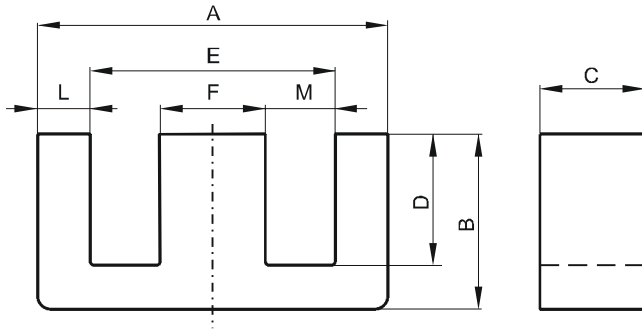

(mm)	Nominal:	Tol. min.:	Tol. max.:
A	19.1	-0.4	+ 0.4
B	8.1	-0.13	+ 0.13
C	4.75	-0.2	+ 0.2
D	5.7	-0.13	+ 0.13
E	14.33	-0.33	+ 0.33
F	4.75	-0.2	+ 0.2
L	2.38 Nom.		
M	4.79 Nom.		
Eff. Parameters			
Ae mm²	Amin mm²	le mm	Ve mm³
22.6	22.1	39.9	900

INDUCTANCE

AL value (nH/T ²)	Test conditions
550 ± 25%	10 kHz, < 0.5 mT, 25 °C

MARKING

No marking

CORE LOSSES

P _i max	Test conditions
228 mW/cm ³ (0.205 W/set)	1000 kHz, 30 mT, 100 °C
Ref. 400 mW/cm ³ (0.36 W/set)	3000 kHz, 10 mT, 100 °C