


DIMENSIONS

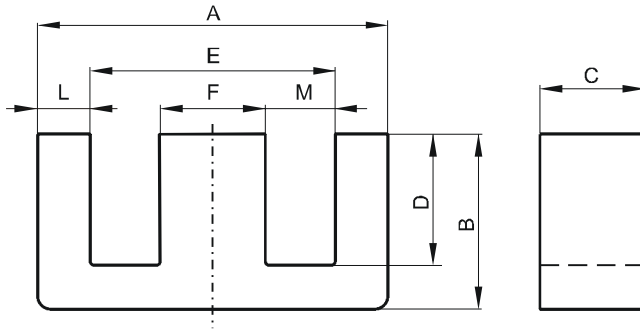

(mm)	Nominal:	Tol. min.:	Tol. max.:
A	19.1	-0.4	+ 0.4
B	8.1	-0.18	+ 0.18
C	9.53	-0.13	+ 0.13
D	5.7 Min.		
E	14.0 Min.		
F	4.75	-0.2	+ 0.2
L	2.38 Ref.		
M	4.79 Ref.		
Eff. Parameters			
Ae mm²	Amin mm²	le mm	Ve mm³
45.5	45.4	40.1	1820

INDUCTANCE

AL value (nH/T²)	Test conditions
1000 ± 25%	10 kHz, < 0.5 mT, 25 °C

MARKING

No marking

CORE LOSSES

P_i max	Test conditions
231 mW/cm ³ (0.42 W/set)	1000 kHz, 30 mT, 100 °C
Ref. 400 mW/cm ³ (0.73 W/set)	3000 kHz, 10 mT, 100 °C