


DIMENSIONS

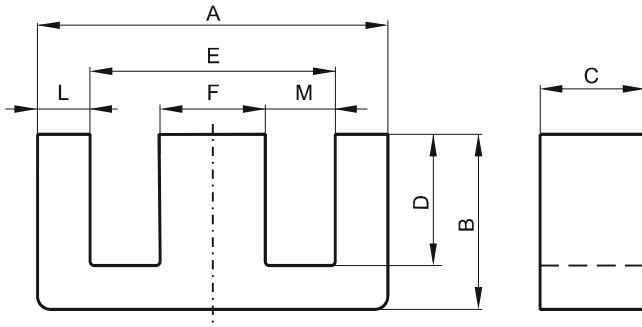

(mm)	Nominal:	Tol. min.:	Tol. max.:
A	30.8	-1.4	0.0
B	15.0	-0.2	+ 0.2
C	7.3	-0.5	0.0
D	9.7	0.0	+ 0.5
E	19.5	0.0	+ 1.0
F	7.2	-0.5	0.0
L	5.65 Nom.		
M	6.15 Nom.		
Eff. Parameters			
Ae mm ²	Amin mm ²	le mm	Ve mm ³
60.0	49.0	67.0	4000

INDUCTANCE

MARKING

AL value (nH/T ²)	Test conditions	No marking
920 ± 25%	10 kHz, < 0.5 mT, 25 °C	

CORE LOSSES

P _i max	Test conditions
< 0.9 W/set (< 225 mW/cm ³)	1000 kHz, 30 mT, 100 °C
< 1.6 W/set (< 400 mW/cm ³)	3000 kHz, 10 mT, 100 °C