


DIMENSIONS

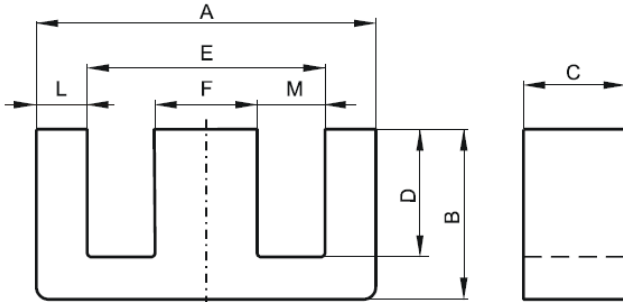

(mm)	Nominal:	Tol. min.:	Tol. max.:
A	30.1	-0.7	+ 0.7
B	15	-0.2	+ 0.2
C	7.05	-0.25	+ 0.25
D	9.95	-0.25	+ 0.25
E	20	-0.5	+ 0.5
F	6.95	-0.25	+ 0.25
L	5.05 Nom.		
M	6.525 Nom.		
Eff. Parameters			
Ae mm ²	Amin mm ²	le mm	Ve mm ³
60	49	67	4000

INDUCTANCE

AL value (nH/T ²)	Test conditions
780 ± 25%	10 kHz, < 0.5 mT, 25 °C

MARKING

No marking

CORE LOSSES

P _L max	Test conditions
< 1.6 W/set (400 mW/cm ³)	1MHz, 50 mT, 100 °C