


**DIMENSIONS**

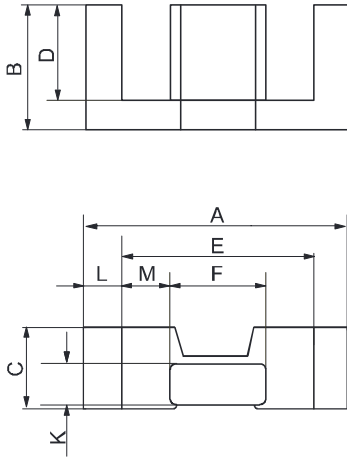

(mm)	Nominal:	Tol. min.:	Tol. max.:
<b>A</b>	30.0	-0.8	+ 0.8
<b>B</b>	15.0	-0.15	+ 0.15
<b>C</b>	9.1	-0.2	+ 0.2
<b>D</b>	11.2	-0.3	+ 0.3
<b>E</b>	22.4	-0.75	+ 0.75
<b>F</b>	14.6	-0.25	+ 0.25
<b>K</b>	4.9	-0.15	+ 0.15
<b>L</b>	3.8 Ref.		
<b>M</b>	3.9 Ref.		
Eff. Parameters			
Ae mm <sup>2</sup>	Amin mm <sup>2</sup>	le mm	Ve mm <sup>3</sup>
69.0	66.0	68.0	4700

**INDUCTANCE**

AL value (nH/T <sup>2</sup> )	Test conditions
1000 ± 25%	10 kHz, < 0.5 mT, 25 °C

**MARKING**

No marking

**CORE LOSSES**

P <sub>i</sub> max	Test conditions
228 mW/cm <sup>3</sup> (1.07 W/set)	1000 kHz, 30 mT, 100 °C
Ref. 400 mW/cm <sup>3</sup> (1.88 W/set)	3000 kHz, 10 mT, 100 °C