




Specification for:
0P41206TC

110 Delta Drive
Pittsburgh, PA 15238
Phone: 412/696-1333
Fax: 412/696-0333
Email:magnetics@spang.com

DIMENSIONS

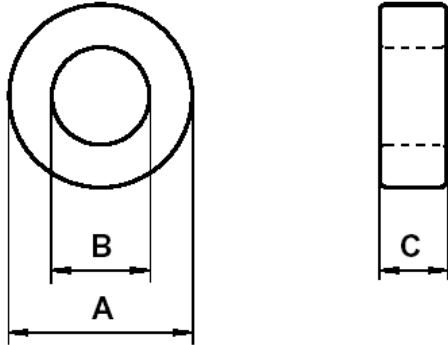

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	12.7	12.44	12.96
I.D. (B)	5.16	4.9	5.42
Ht. (C)	6.35	6.17	6.53

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
7.1	31.7	226

INDUCTANCE

AL value (nH/T ²)	Test conditions
2820 ± 25%	10 kHz, 0.5 mT (For N = 5, use 0.5 mA), 25°C

CORE LOSSES

P _L max	Production lot limit Max avg	Test conditions
27.8 mW (123 mW/cm ³)	25.3 mW (112 mW/cm ³)	100 kHz, 100 mT, 100°C

COATING

Uncoated

NOTE

Spec. modifications	Previous	Revised
2005.12.05	Losses: General P material	Losses: Detail as indicated