


**DIMENSIONS**

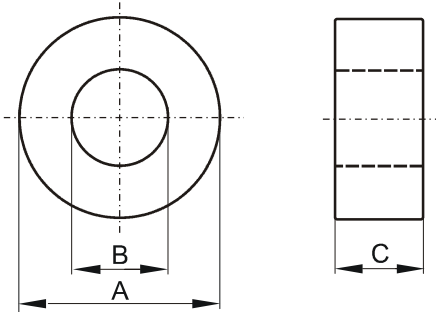

(mm)	Uncoated Nominal:	Min:	Max:
<b>O.D. (A)</b>	12.7	12.44	12.96
<b>I.D. (B)</b>	7.14	6.88	7.40
<b>Ht. (C)</b>	6.35	6.17	6.53
Eff. Parameters			
<b>Ae mm<sup>2</sup></b>	<b>le mm</b>	<b>Ve mm<sup>3</sup></b>	
17.1	29.5	507	

**INDUCTANCE**

AL value (nH/T <sup>2</sup> )	Test conditions
1805 ± 25%	10 kHz, 0.5 mT (For N=5, use 0.55 mA), 25°C

**CORE LOSSES**

P <sub>i</sub> max	Production lot limit Max avg	Test conditions
< 62.4 mW (< 123 mW/cm <sup>3</sup> )	< 56.8 mW (< 112 mW/cm <sup>3</sup> )	100 kHz, 100 mT, 100 °C

**COATING**

Uncoated
----------

**NOTE**

Spec. modifications	Previous	Revised
2007-06-05	Losses: General P material	Losses: Detail as indicated