


DIMENSIONS

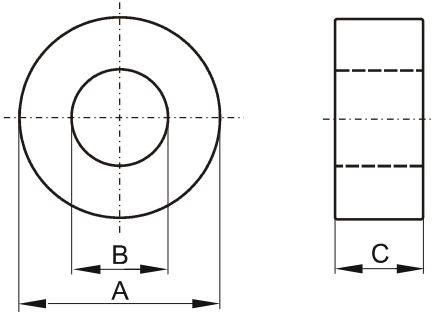

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	49.1	48.36	49.84
I.D. (B)	33.8	33.07	34.53
Ht. (C)	31.3	30.34	32.26
Eff. Parameters			
Ae mm²	le mm	Ve mm³	
237	127	30100	

INDUCTANCE

AL value (nH/T ²)	Test conditions
5900 ± 25%	10 kHz, 0.5 mT (For N=5, use 2.4 mA), 25°C

CORE LOSSES

P _i max	Production lot limit Max avg	Test conditions
< 4.07 W (< 135 mW/cm ³)	< 3.70 W (< 123 mW/cm ³)	100 kHz, 100 mT, 100 °C

COATING

Uncoated

NOTE

Spec. modifications	Previous	Revised
2007-06-05	Bare Nom Ht = 31.8 Losses: General P material	Bare Nom Ht = 31.3 Losses: Detail as indicated