




Specification for:
0P46113TC

110 Delta Drive
Pittsburgh, PA 15238
Phone: 412/696-1333
Fax: 412/696-0333
Email:magnetics@spang.com

DIMENSIONS

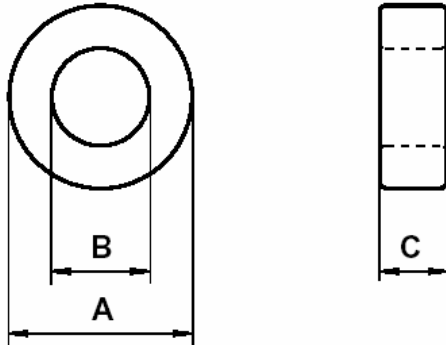

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	61.0	60.15	61.85
I.D. (B)	35.6	34.67	36.53
Ht. (C)	12.7	12.44	12.96

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
157.4	144.6	22774

INDUCTANCE

AL value (nH/T ²)	Test conditions
3491 ± 25%	10kHz, 0.5 mT (For N = 5, use 0.54 mA), 25°C

CORE LOSSES

P _L max	Production lot limit Max avg	Test conditions
3074 mW (135 mW/cm ³)	2801 mW (123 mW/cm ³)	100 kHz, 100 mT, 100°C
-	-	-

COATING

Uncoated

NOTE

Spec. Modifications	Previous	Revised
2006.01.11	Losses: General P Material	Losses: Detail as indicated