


DIMENSIONS

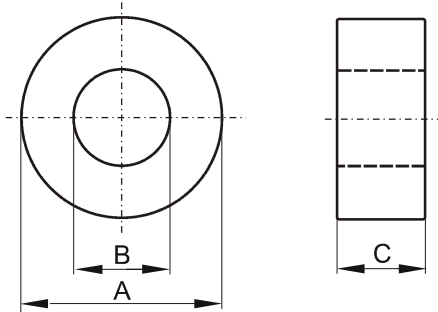

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	63.0	62.11	63.89
I.D. (B)	38.0	37.1	38.9
Ht. (C)	24.5	23.62	25.38
Eff. Parameters			
Ae mm²	le mm	Ve mm³	
300	152	45600	

INDUCTANCE

AL value (nH/T ²)	Test conditions
6270 ± 25%	10 kHz, 0.5 mT (For N=5, use 2.9 mA), 25°C

CORE LOSSES

P _i max	Production lot limit Max avg	Test conditions
< 6.16 W (< 135 mW/cm ³)	< 5.61 W (< 123 mW/cm ³)	100 kHz, 100 mT, 100 °C

COATING

Uncoated

NOTE

Spec. modifications	Previous	Revised
2007-06-05	Losses: General P material	Losses: Detail as indicated