




Specification for:
0P47313TC

110 Delta Drive
Pittsburgh, PA 15238
Phone: 412/696-1333
Fax: 412/696-0333
Email:magnetics@spang.com

DIMENSIONS

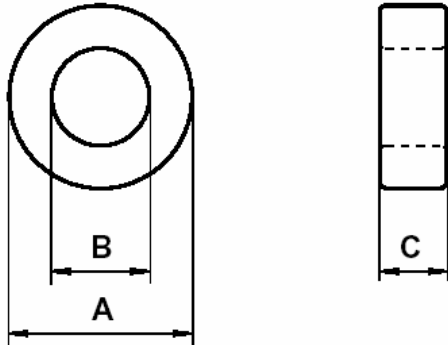

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	73.7	72.7	74.7
I.D. (B)	38.9	37.9	39.9
Ht. (C)	12.5	12.04	12.96

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
210	165	34771

INDUCTANCE

AL value (nH/T ²)	Test conditions
4024 ± 25%	10kHz, 0.5 mT (For N = 5, use 0.62 mA), 25°C

CORE LOSSES

P _L max	Production lot limit Max avg	Test conditions
4932 mW (142 mW/cm ³)	4468 mW (129 mW/cm ³)	100 kHz, 100 mT, 100°C
-	-	-

COATING

Uncoated

NOTE

Spec. Modifications	Previous	Revised
2006.01.11	Bare Nom Ht = 12.7 Losses: General P Material	Bare Nom Ht = 12.5 Losses: Detail as indicated