


DIMENSIONS

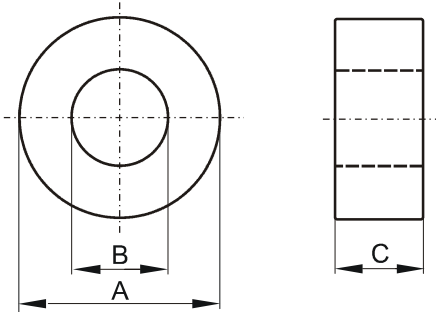

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	85.7	84.4	87.0
I.D. (B)	55.5	54.28	56.72
Ht. (C)	25.4	24.89	25.91
Eff. Parameters			
Ae mm²	le mm	Ve mm³	
375	215	80700	

INDUCTANCE

AL value (nH/T ²)	Test conditions
5480 ± 25%	10 kHz, 0.5 mT (For N=5, use 4 mA), 25°C

CORE LOSSES

P _i max	Production lot limit Max avg	Test conditions
< 11.3 W (< 139 mW/cm ³)	< 10.3 W (< 127 mW/cm ³)	100 kHz, 100 mT, 100 °C

COATING

Uncoated

NOTE

Spec. modifications	Previous	Revised
2007-06-05	Losses: General P material	Losses: Detail as indicated