




Specification for:

0R41106IC

110 Delta Drive
 Pittsburgh, PA 15238
 Phone: 412/696-1333
 Fax: 412/696-0333
 Email:magnetics@spang.com

DIMENSIONS

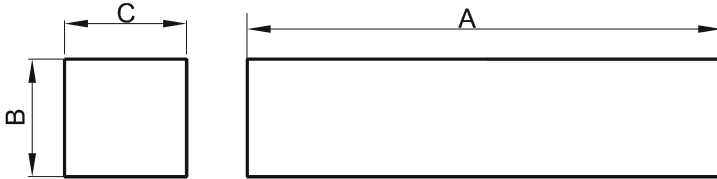

(mm)	Nominal:	Tol. min.:	Tol. max.:
A	10.8	-0.2	+ 0.2
B	1.83	-0.12	+ 0.12
C	6.3	-0.13	+ 0.13
Eff. Parameters (with 0_41106UC)			
Ae mm²	Amin mm²	le mm	Ve mm³
11.5	11.5	24.6	283

INDUCTANCE

AL value (nH)	Test conditions (with 0R41106UC)
Nom: 1027 Min.: 710	10 kHz, < 0.5 mT, 25 °C

MARKING

No marking

CORE LOSSES

P_i max	Test conditions
95 mW/cm ³ (0.027 W/set)	100 kHz, 100 mT, 100 °C
565 mW/cm ³ (0.16 W/set)	100 kHz, 200 mT, 100 °C

NOTE

Spec. modifications	Previous	Revised
2005-06-22	A=10.64 Min. Losses: General R material	A=10.60 Min. Losses: Detail as indicated